



Features:


- No Load power consumption<0.5W
- Universal AC input range
- Miniature size,high power density,high efficiency,long life and high reliability
- Withstand 300VA surge input for 5 sec.
- Output protections: OLP/OVP/SCP
- Wide operating ambient temp (-25°C ~70°C), 100% @50°C、60%@70°C
- Operating altitude up to 5000M
- All using 105°C long life electrolytic capacitors.
- 100% full load burn-in test
- Easy assembling from top side
- PCB soldering side with conformal coating
- Suitable for critical applications
- 3 years warranty

SPECIFICATION


MODEL		MFPD-35-5	MFPD-35-12	MFPD-35-15	MFPD-35-24	MFPD-35-48	
OUTPUT	DC Output	5V	12V	15V	24V	48V	
	Rated Current	6A	3A	2.4A	1.5A	0.76A	
	Current Range	0~6A	0~3A	0~2.4A	0~1.5A	0~0.76A	
	Ripple and Noise Note 2	0~70°C	<50mV	<80mV	<120mV	<120mV	<180 mV
		-25~0°C	<80mV	<180mV	<200mV	<200mV	<240mV
	Voltage ADJ. Range	4.75V~5.5V	11.4V~13.2V	14.3~16.5V	22.8V~26.4V	45.6V~52.8V	
	Voltage Accuracy	±3.0%	±3.0%	±3.0%	±3.0%	±3.0%	
	Line Regulation	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	
	Load Regulation	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%	
	Set-up Time	< 1S (230Vac input, Full load);					
	Hold up Time	> 20mS(230Vac input, Full load); > 10mS(120Vac input, Full load)					
Temperature Coefficient	±0.03%/°C						
Overshoot and Undershoot	<5.0%						
INPUT	Voltage Range	90Vac~264Vac, 127~370Vdc					
	Frequency Range	47Hz~63Hz					
	Efficiency (Typical)	115Vac input	79%	83%	85%	86%	87%
		230Vac input	80%	84%	86%	87%	88%
	AC Current (max.)	<1A(max)					
	Inrush Current (Typical)	<50A@230Vac Cold start					
	Leakage Current	Input—output:<3.5mA Input—PG:<0.25mA					
PROTECTION	Over Load	105%~150% of rated output current, constant power,auto recovery					
	Over Voltage	105%~150% of rated output voltage, Constant Voltage					
	Short Circuit	Long-term mode, auto recovery					
ENVIRONMENT	Operating amb. Temp. & Hum.	-25°C ~70°C; 20%~90%RH No condensing (refer to the derating curve)					
	Storage Temp. & Hum.	-40°C ~85°C; 10%~95%RH No condensing					
SAFETY & EMC Note 3	Safety Standards	UL60950-1; EN60950-1: 2006					
	Withstand Voltage	Primary-Secondary:3.0KVAc; ≤10mA .Primary-PG:1.5KVAc; ≤10mA. Secondary-PG:0.5KVDC;≤10mA.					
	Isolation Resistance	≥100M ohms					
	EMI Conduction&Radiation	Compliance to EN55022(CISPR22) ClassB					
	Harmonic Current	Compliance to EN61000-3-2,-3					
	EMS Immunity	Compliance to EN61000-4-2,3,4,5,6,8,11;ENV50204,light industry level,criteriaA					
OTHERS	MTBF (MIL-HDBK-217F)	More than 200,000Hrs (25°C, Full load)					
	Dimension (L*W*H)	101.6×63.5×33mm					
	Packing	60PCS/CTN, 15.18KGS, 0.06CBM					
	Cooling method	Cooling by free air convection					
NOTE	1. All parameters NOT specially mentioned are measured at 230Vac input, rated load and 25°C of ambient temperature. 2. Measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1 uF & 47uF parallel capacitor. 3. The SPS is considered a component which will be installed into final equipment. The equipment must be re-confirmed that it still meets EMC directives.						

Mechanical Specification

Unit: mm

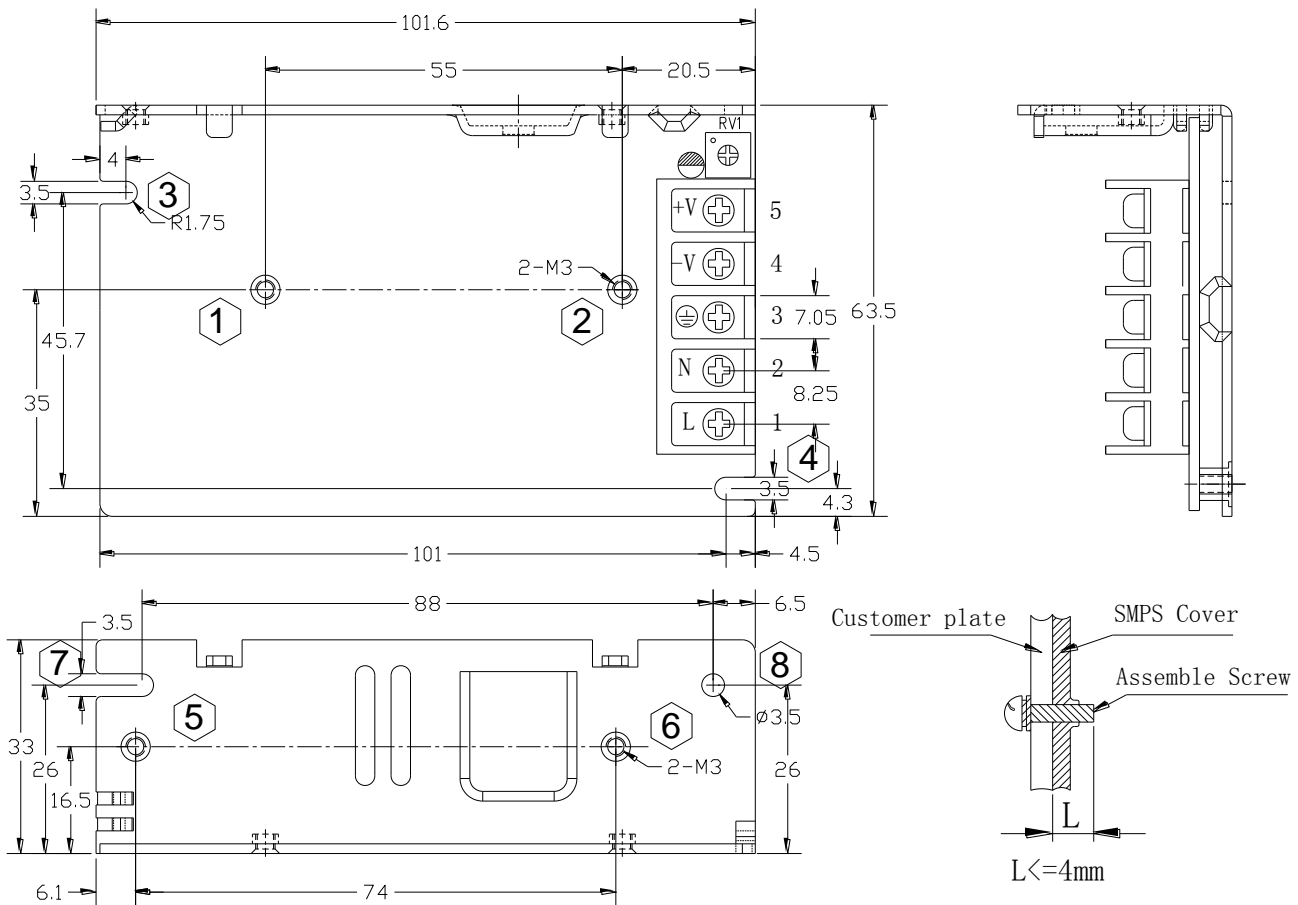

Block Diagram

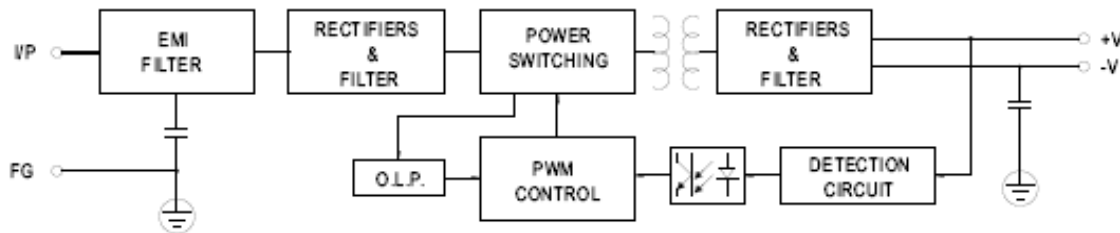

Derating Curve

